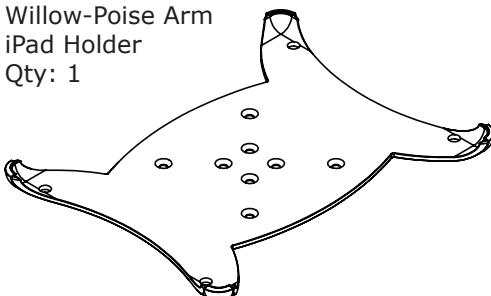




# Important Safety Instructions



Use only a slightly damp cloth to clean the Willow Arm surface. Never use flammable solvents like alcohol, benzene, thinner, etc. on the product.

## Parts

<b>A</b> Willow-Poise Arm iPad Holder Qty: 1 	<b>B</b> #10 x 32 x 1/2 Phillips Screws Qty: 4 	<b>C</b> #10 x 32 Keps Nuts Qty: 4 
--	--	--


### 1 Attach iPad Holder to Monitor Arm

Insert 4 screws (B) through the iPad Holder (A) and the 75 mm VESA plate of the Willow arm, securing each screw with a Washer Nut (C).

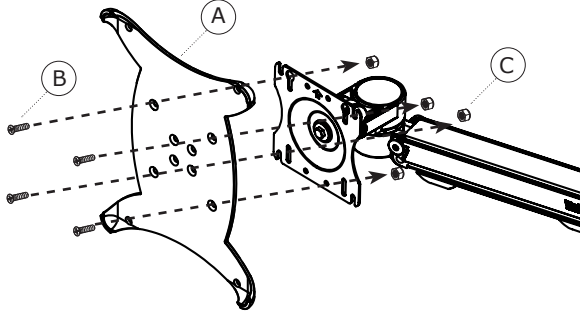

### 2 Attach iPad

- a** Place the iPad into the bottom corners of the iPad holder.
- b** Push the top corners of the iPad until it snaps into place.

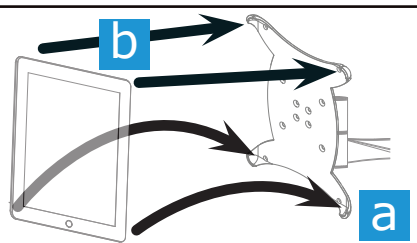

### 3 Adjust monitor arm balance

Once installation is complete it may be necessary to adjust the balance of the monitor arm. See the instructions supplied with the monitor arm for directions.

### 4 To Detach iPad

To remove your iPad from the holder, use both hands and press firmly on the right and left top corners of the holder to un-snap your iPad.